


CAMLOCK DIN EN 14420-7

Camlock Aluminio Macho - Rosca Hembra BSP TIPO A



Normas: EN 14420-7 / DIN 2828

Material: Aluminio A356

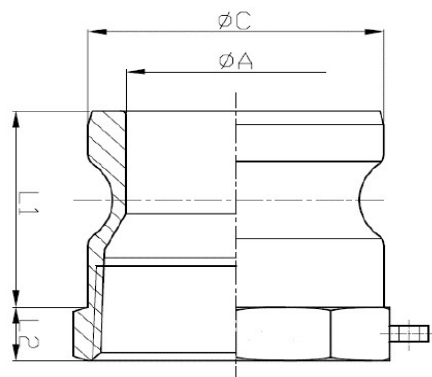

Material:
Aluminio A356

Normas:
EN 14420-7 / DIN 2828

Propiedades

Referencia	Diámetro Nominal	Rosca Hembra	Presión de Trabajo	ØA	ØC	L1	L2	Peso
	(mm)	(pulg.)	(bar)	(mm)	(mm)	(mm)	(mm)	(g)
C746500	15	1/2"	10	13	23,8	25,5	14,5	26
C746510	20	3/4"	10	21,2	32,1	25,5	14,5	41
C746520	25	1"	10	24	36,7	33,5	15,5	60
C746532	32	1-1/4"	10	29	45,5	39,6	15	99
C746540	40	1-1/2"	10	36,5	53,4	41	15	118
C746550	50	2"	10	46	63	47,5	15,5	145
C746560	65	2-1/2"	10	57	75,8	49,2	19	253
C746570	80	3"	10	73	91,5	50	19	282
C746580	100	4"	8	99	119,5	52,5	24	476
C746590	125	5"	8	125	145,6	54	25	585
C746600	150	6"	8	151,5	176	57	25,5	948
C749225	200	8"	8	201,5	231	85	28	2197

tipsa: se reserva el derecho de modificar cualquier especificación sin previo aviso para cumplir o exceder los estándares cambiantes.

TIPSA - Kuriyama Group · Av. de Barcelona, 20 · 08970 Sant Joan Despí / Barcelona, Spain
T. +34 93 602 1818 · www.tipsa.com