


CAMLOCK DIN EN 14420-7

Camlock Inoxidable Macho - Rosca Hembra BSP TIPO A



Normas: EN 14420-7 / DIN 2828

Material: Acero Inoxidable 316

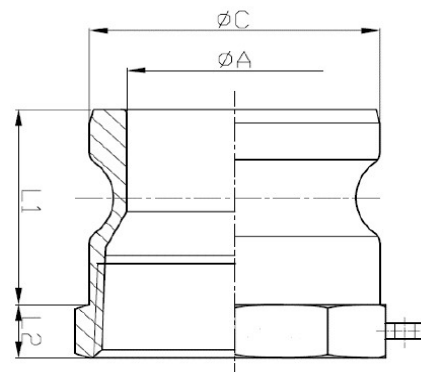

Material:

Acero Inoxidable 316

Normas:

EN 14420-7 / DIN 2828

Propiedades

Referencia	Diámetro Nominal	Rosca Hembra	Presión de Trabajo	ØA	ØC	L1	L2	Peso
	(mm)	(pulg.)	(bar)	(mm)	(mm)	(mm)	(mm)	(g)
C746502	15	1/2"	10	14	23,8	25,5	14,6	68
C746512	20	3/4"	10	22	32,1	25,5	11	94
C746522	25	1"	10	25	36,7	33,5	12	146
C746530	32	1-1/4"	10	30	45,5	39,6	12	209
C746542	40	1-1/2"	10	38	53,4	41	13	302
C746552	50	2"	10	47	63	47,5	13	381
C746562	65	2-1/2"	10	58	75,8	49,2	16	732
C746572	80	3"	10	75	91,5	50	18	655
C746582	100	4"	8	102	119,5	52,5	21	1072
C746592	125	5"	8	125	-- --	-- --	-- --	1576
C746602	150	6"	8	154	176	57	23,5	2469

tipsa: se reserva el derecho de modificar cualquier especificación sin previo aviso para cumplir o exceder los estándares cambiantes.

TIPSA - Kuriyama Group - Av. de Barcelona, 20 - 08970 Sant Joan Despí / Barcelona, Spain
T. +34 93 602 1818 - www.tipsa.com