


CAMLOCK DIN EN 14420-7

Camlock Aluminio Hembra - Rosca Macho BSP TIPO B



Normas: EN 14420-7 / DIN 2828

Material: Aluminio A356

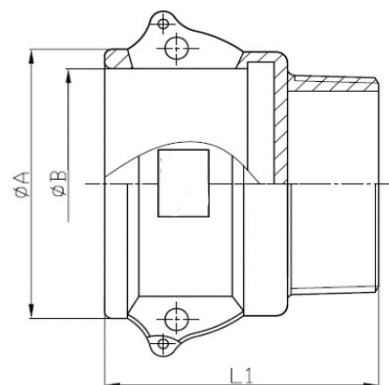

Material:

Cuerpo aluminio A356
Levas Acero Inoxidable 304L
Junta NBR

Normas:

EN 14420-7 / DIN 2828

Propiedades físicas:

Referencia	Diámetro Nominal	Rosca Macho	Presión de Trabajo	ØA	ØB	L1	Peso
	(mm)	(pulg.)	(bar)	(mm)	(mm)	(mm)	(g)
C746750	15	1/2"	10	33	24,3	46	83
C746760	20	3/4"	10	41	32,5	47	94
C746770	25	1"	10	48	37,3	56	143
C746850	32	1-1/4"	10	57	46	63	264
C746780	40	1-1/2"	10	66	54	66	276
C746790	50	2"	10	77	63,8	76	331
C746840	65	2-1/2"	10	89,7	76,5	83	385
C746800	80	3"	10	106	92,2	87	560
C746810	100	4"	8	137	120,2	94,5	812
C746820	125	5"	8	163	146,2	98,5	1008
C746830	150	6"	8	195	176,5	108,5	1641
-- --	200	8"	8	258	232	140	3965

tipsa: se reserva el derecho de modificar cualquier especificación sin previo aviso para cumplir o exceder los estándares cambiantes.

TIPSA - Kuriyama Group · Av. de Barcelona, 20 · 08970 Sant Joan Despí / Barcelona, Spain
T. +34 93 602 1818 · www.tipsa.com