


CAMLOCK DIN EN 14420-7

Camlock Aluminio Hembra - Rosca Hembra BSP TIPO D



Normas: EN 14420-7 / DIN 2828

Material: Aluminio A356

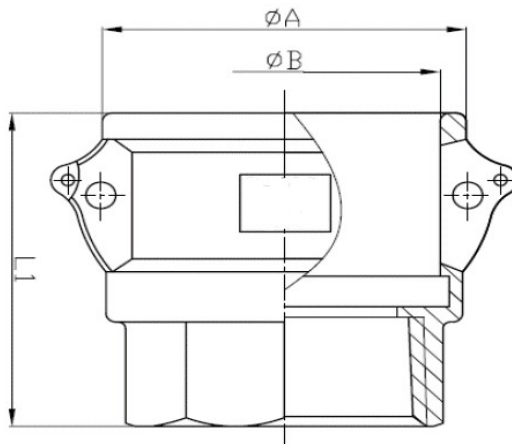

Material:

Cuerpo aluminio A356
Levas Acero Inoxidable 304L
Junta NBR

Normas:

EN 14420-7 / DIN 2828



Propiedades físicas:

Referencia	Diámetro Nominal (mm)	Rosca Hembra (pulg.)	Presión de Trabajo (bar)	ØA (mm)	ØB (mm)	L1 (mm)	Peso (g)
C746990	15	1/2"	10	33	24,3	45	89
C747000	20	3/4"	10	41	32,5	46	101
C747010	25	1"	10	48	37,3	56	152
C747070	32	1-1/4"	10	57	46	63	276
C747020	40	1-1/2"	10	66	54	66	298
C747030	50	2"	10	77	63,8	76	358
C747040	65	2-1/2"	10	89,7	76,5	83	454
C747050	80	3"	10	106	92,2	87	605
C747060	100	4"	8	137	120,2	93,5	820
C749723	125	5"	8	163	146,2	99	1091
C747080	150	6"	8	195	176,5	108,5	1961
C749724	200	8"	8	258	232	140	4192

tipsa: se reserva el derecho de modificar cualquier especificación sin previo aviso para cumplir o exceder los estándares cambiantes.

TIPSA - Kuriyama Group · Av. de Barcelona, 20 · 08970 Sant Joan Despí / Barcelona, Spain
T. +34 93 602 1818 · www.tipsa.com