


CAMLOCK DIN EN 14420-7

Camlock PP Hembra - Para Manguera TIPO C



Normas: EN 14420-7 / DIN 2828

Material: Polipropileno

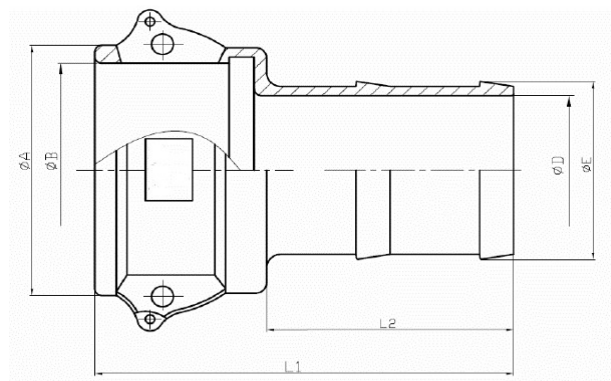

Material:

Cuerpo Polipropileno

Levas Acero Inoxidable 304L

Junta NBR

Normas:

EN 14420-7 / DIN 2828

Propiedades físicas:

Referencia	Diámetro Nominal	Tamaño	Presión de Trabajo	ØA	ØB	ØD	ØE	L1	L2	Peso
	(mm)	(pulg.)	(bar)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(g)
C748073	15	1/2"	10	33	24,3	7,5	15	64,5	34	76
C749773	20	1/2"	10	41	32,5	7,5	15	64,5	34	69
C748093	20	3/4"	10	41	32,5	13	21,4	92,5	51	78
C748103	25	1"	10	48	37,3	19,5	27,3	106	57	106
C748113	32	1-1/4"	10	57	46	25	34	112	57	178
C749793	40	1-1/4"	10	66	54	25	34	112	57	196
C748069	40	1-1/2"	10	66	54	31,5	40,5	118	60,5	198
C748123	50	2"	10	77	63,8	44	53	135	70	337
C748143	80	3"	10	106	92,2	67,5	79,3	161	105	476
C748145	100	4"	8	137	120,2	91	104,7	164,5	106	904

tipsa: se reserva el derecho de modificar cualquier especificación sin previo aviso para cumplir o exceder los estándares cambiantes.

TIPSA - Kuriyama Group · Av. de Barcelona, 20 · 08970 Sant Joan Despí / Barcelona, Spain
T. +34 93 602 1818 · www.tipsa.com