


CAMLOCK DIN EN 14420-7

Camlock Aluminio Macho - Para Manguera TIPO E



Normas: EN 14420-7 / DIN 2828

Material: Aluminio A356

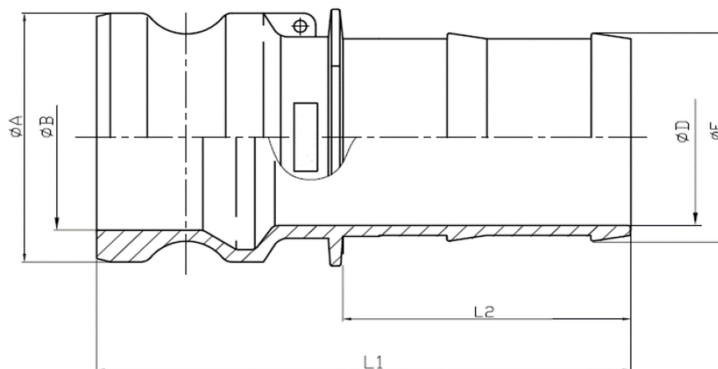

Material:
Aluminio A356

Normas:
EN 14420-7 / DIN 2828

Propiedades físicas:

Referencia	Diámetro Nominal (mm)	Tamaño (pulg.)	Presión de Trabajo (bar)	ØA (mm)	ØB (mm)	ØD (mm)	ØE (mm)	L1 (mm)	L2 (mm)	Peso (g)
C749000	15	1/2"	10	23,8	13	7,5	15	72	35	34
C749010	20	3/4"	10	32,1	21,2	13	21,4	87,5	51	50
C749020	25	1"	10	36,7	24	19,5	27,3	102	57	90
C749030	32	1"1/4	10	45,5	29	25	34	108	57	151
C749040	40	1"1/2	10	53,4	36,5	31,5	40,5	113	60,5	167
C749050	50	2"	10	63	46	42,5	53	131	70	291
C749060	65	2"1/2	10	75,8	57	55	66,7	142	79,3	397
C749070	80	3"	10	91,5	73	67,5	79,3	166	102	518
C749080	100	4"	8	119,5	98	92	104,7	173,5	107	866
C749090	125	5"	8	145,6	125	117	129,8	183,5	114,5	1108
C749100	150	6"	8	176	151,5	142	155	233	168	1863
C749671	200	8"	8	231	201,5	190	206,5	278,5	185	4240

tipsa: se reserva el derecho de modificar cualquier especificación sin previo aviso para cumplir o exceder los estándares cambiantes.

TIPSA - Kuriyama Group · Av. de Barcelona, 20 · 08970 Sant Joan Despí / Barcelona, Spain
T. +34 93 602 1818 · www.tipsa.com