


CAMLOCK DIN EN 14420-7

Camlock Latón Macho - Rosca Macho BSP TIPO F



Normas: EN 14420-7 / DIN 2828

Material: Latón

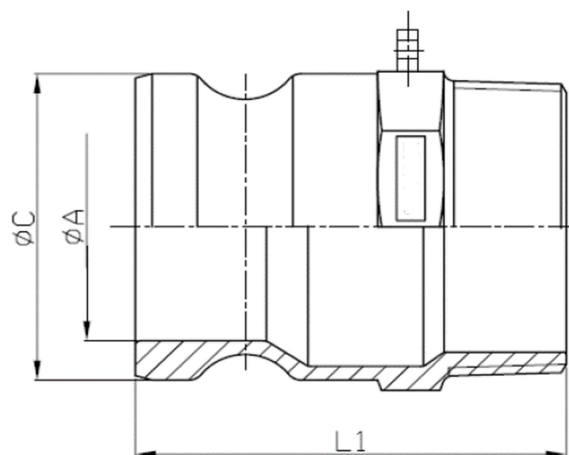

Material:
Latón

Normas:
EN 14420-7 / DIN 2828

Propiedades físicas:



Referencia	Diámetro Nominal (mm)	Rosca Macho (pulg.)	Presión de Trabajo (bar)	ØA (mm)	ØC (mm)	L1 (mm)	Peso (g)
C749201	15	1/2"	10	13	23,8	56	78
C749211	20	3/4"	10	21,2	32,1	55	108
C749221	25	1"	10	24	36,7	66	159
C749231	32	1-1/4"	10	29	45,5	73,6	266
C749241	40	1-1/2"	10	36,5	53,4	76	334
C749251	50	2"	10	46	63	86,5	510
C749261	65	2-1/2"	10	57	75,8	97,2	843
C749271	80	3"	10	73	91,5	100	1018
C749281	100	4"	8	99	119,5	112	1573

tipsa: se reserva el derecho de modificar cualquier especificación sin previo aviso para cumplir o exceder los estándares cambiantes.

TIPSA - Kuriyama Group - Av. de Barcelona, 20 · 08970 Sant Joan Despí / Barcelona, Spain
T. +34 93 602 1818 · www.tipsa.com